


Model: ADVANCE 1L WARM OAK

Codes: 100243229

Group: G-244


Format: 218X19,8X1,4CM

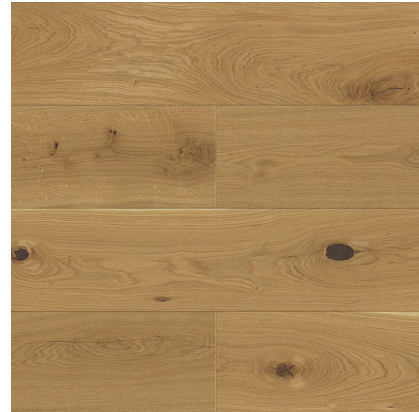

ADDITIONAL NOTES

Due to better usage of the wood, any order of this reference may contain mean percentage boards of between 15% y 20%. While the color of the skirting boards, profiles, and step borders may vary depending on the model, the color shall be as similar as possible to the wood floor.

COMPOSITION























	Size	Material	Type of material
Layer 1	0.060-0.070	Varnish	Apresto Mate treatment
Layer 2	3	Hardwood Layer	Oak wood
Layer 3	9	Intermediate Layer	Wood or HDF slats
Layer 4	2	Backside	Coniferous wood

LABORATORY TESTS

Resistance to abrasion	≥500	UNE-EN 13696*
Thermal conductivity	0.17 W/M*K	UNE-EN 12667:2002*
Heat resistance	0.082 M2*K/W	UNE-EN 12667:2002*
Formaldehyde emissions	E1	EN 717*
Gluing resistance	≥D3	EN 204*
Moisture content	5-9 %	UNE-EN 13183-1/AC:2004*
Flammability	Dfl-s1	EN 13501*
Bulk density	785 KG/M3	UNE-EN 323:1994*
Biological durability	Clase 1	UNE EN 335 -1 ; UNE EN 335-2*
Slip resistance (pendulum-wet)	CL 1 (30)	UNE 41901*
Slip resistance (pendulum-dry)	CL 3 (50)	UNE 41902*
Slip resistance (dcof)	0.43	ANSI A137.1*



FEATURES

-  Safety and joint durability are the main features of this easy installation system that guarantees the elimination of gaps between boards throughout the floor's lifetime. The pressure exerted between boards reinforces the union and prevents it from being carried out incorrectly.
-  Slight smoothing of the wood using a brush to achieve a surface with a slight relief.
-  L'ANTIC COLONIAL's varnishing, in two finishes, APRESTO (gloss) and APRESTO MATE (matte), provides a unique surface quality that satisfies the most demanding requirements. Advantages: It achieves the highest cleanliness because, since the pores are sealed, dirt and dust remain on the surface and can be easily cleaned.
-  Is suitable for installing on water radiant heating
-  Material with many knots on its surface that can have different sizes depending on the type of wood. These, along with any cracks that may appear, are covered with putty.
-  Installation system where gluing the boards to the floor is not necessary. They are placed on a foam, joined together, as long as the product does not already have a foil on the back of the piece.
-  There are consistent color changes between pieces.
-  Material from a European country.
-  Structure formed by an upper layer that shows the noble aspect of the material, an intermediate layer of wood of different typology, depending on the collection, or HDF board that compensates the tensions between the different parts and a lower plywood that provides dimensional stability.
-  It is necessary to apply adhesive for installing it.
-  Applying a color oil or varnish on the wood surface in order to get different color ranges.
-  Beveled cut on all 4 edges of the board for emphasizing size
-  Quality product made with selected raw materials, guaranteeing its full residential use for 30 years as provided by L' Antic Colonial.
-  Format where only one board has been used to finish the entire base surface
-  It is necessary to apply adhesive for installing it.
-  Made with oak wood.
-  Material from a North American country.
-  PanEuropean Forest Certification that guarantees to consumers the origin of the products from sustainably managed forests
-  3 mm
-  Installation system where gluing the boards to the floor is not necessary. They are placed on a foam, joined together, as long as the product does not already have a foil on the back of the piece.

PACKING

Sales units per box	3.02148 M2/BOX	
Sales units per pallet	105.751799 M2/PAL	
Sales units per square meter	1 M2	
Sale unit	M2	
Base unit	ST	
Net weight	11.803818 KG/M2	
Gross weight	12.262534 KG/M2	

SPECIAL PIECES

SAP	Description	Group	Boxes	Pallet	Units	SKU	Basic Unit	Net Weight	Gross weight
100114233	IGUALACION ADVANCE WARM OAK 4,5X270X1,3	G-161	10 PIECES/BOX	1000 PIECES/PAL	8.23 PIECES/M2	-	-	1 KG/PIECES	1.02 KG/PIECES
100176570	MAMPERLAN ADVANCE 1L WARM OAK 7X120X3	G-163	2 PIECES/BOX	200 PIECES/PAL	11.9 PIECES/M2	-	-	1.58 KG/PIECES	1.64 KG/PIECES
100114249	TRANSICION ADVANCE WARM OAK 4X270X1,3	G-161	10 PIECES/BOX	1000 PIECES/PAL	9.26 PIECES/M2	-	-	1 KG/PIECES	1.02 KG/PIECES
100114258	ZOCALO ADVANCE WARM OAK 8X220X1,4	G-128	12 PIECES/BOX	600 PIECES/PAL	5.68 PIECES/M2	-	-	1.33 KG/PIECES	1.38 KG/PIECES

