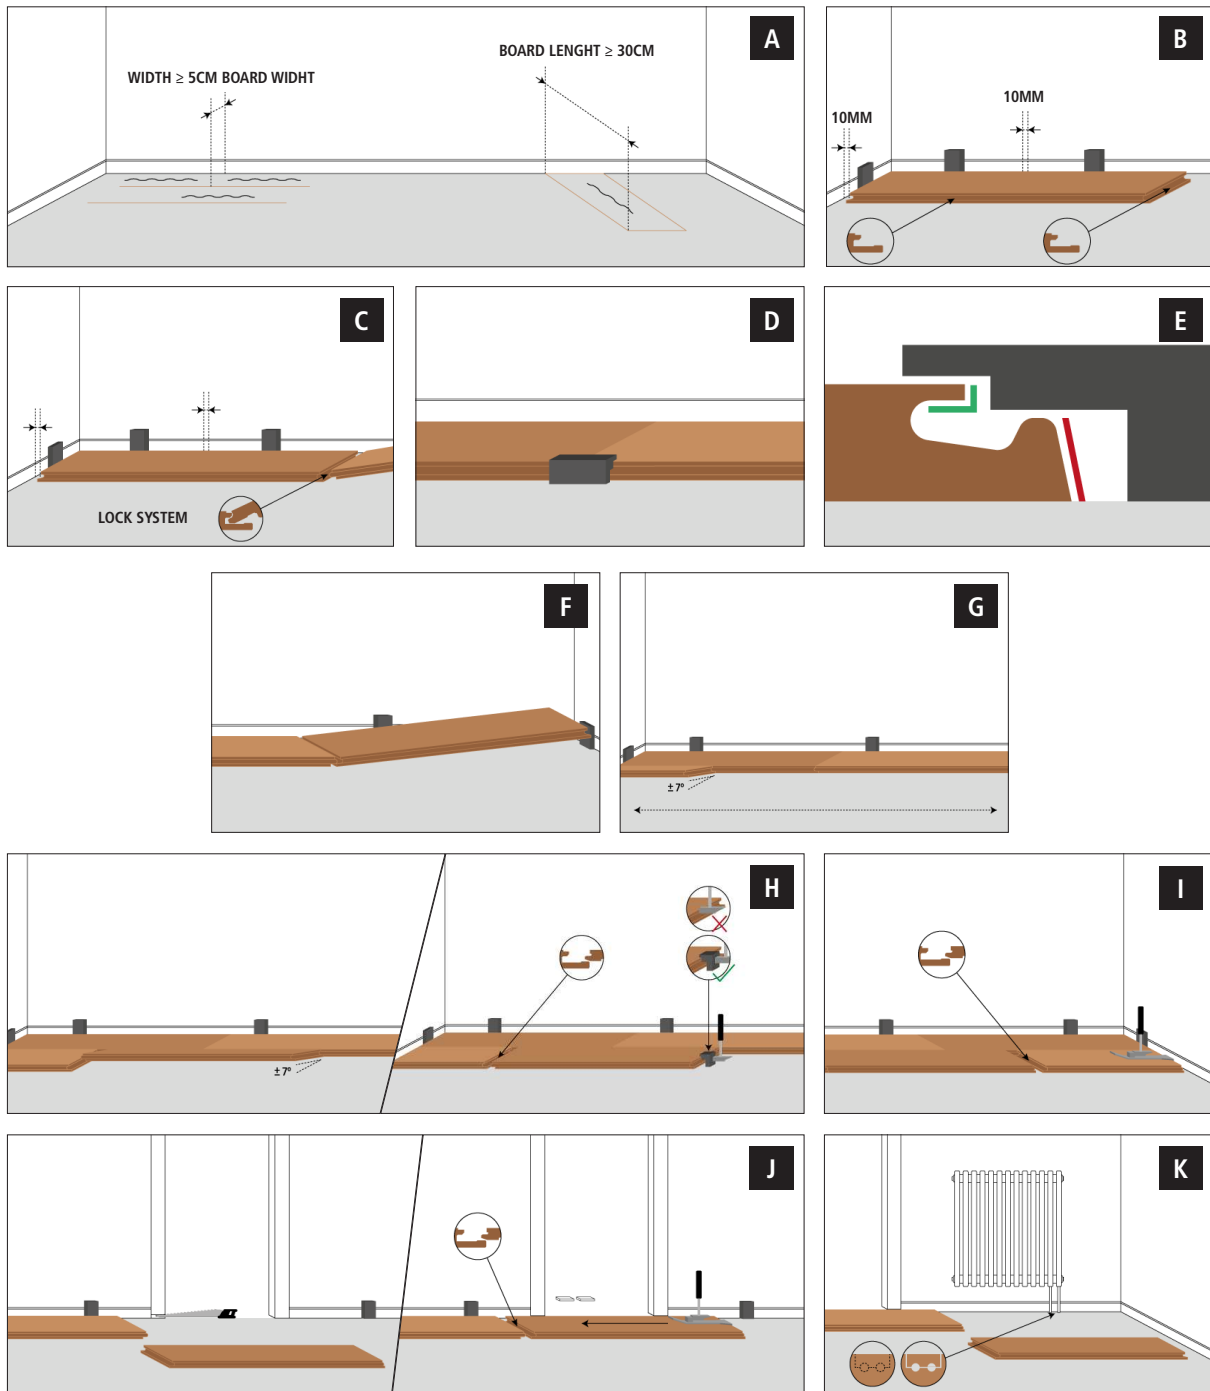


## INSTALLATION INSTRUCTIONS

## Linkfloor Kingdom, Multiformat, Legend

**1. GENERAL INFORMATION**

The importance of reading and properly understanding the information contained in these instructions cannot be exaggerated, since improper handling, installation, use or maintenance of the product could result in cancellation of the warranty.

These installation specifications are for Lock system. All recommendations are based on the most recent available information. The information on this sheet provides general guidelines. All instructions and recommendations must be strictly followed for a satisfactory installation.

The floor covering must be stored and installed in climate constant or climate controlled indoor locations with an average temperature of between 18°-29°C. The air humidity shall never exceed 65% during the installation. Before installing it, carefully check that the product has not been damaged during transportation and we recommend checking the color, design, quantity, dimensions and appearance against the ordered product and for any visible defects, prior to installation. Damaged material will never

be replaced once installed. Some differences in the color and structure are due to the very nature of the material, so they cannot be the subject of any claim.

Bear in mind that the uniformity of the color of the boards can only be guaranteed for boards from the same production batch.

**2. PREPARATION****2.1 Receipt and storage**

The vinyl flooring can only be stored and installed in indoor areas. Never store the boxes vertically or in a damp environment, in rooms with dust, places with extreme temperatures or exposed to drafts. Store and transport the material in a horizontal position, without resting it against walls, laying it flat on strips or on the pallet, and 0.5 m away from any walls, distributing it around the rooms in which it is going to be installed.

**2.2 Environmental conditions**

It is essential to let your flooring acclimate to the room in which it is going to be installed, for at least 48 hours prior to installation, at

a temperature between 18°C and 29°C. It is necessary to maintain the same temperature before, during and for at least 72 hours after completing the installation.

**2.3 Subfloors:**

For the installation of floating vinyl floors, careful preparation of the base floor helps to ensure a satisfactory installation. Rough or uneven areas in the subfloor can be transferred to the newly-installed vinyl flooring, put pressure on it and lead to breakages, the loosening of joints, buckling, warping, noise when walking on it and an unsightly overall appearance. Do not install it on a floating floor.

Although it is possible to install linkfloor on various types of floor slab, L'Antic Colonial recommends slabs made of cement mortar, marble, terrazzo or anhydrite provided that comply with the following:

Cement base floors should be smooth, dry and free of dust, liquids, paint, wax, grease, oil, sealant and other foreign materials. The surface should be hard and sealed and free of dusty or flaking areas. New cement floors should be completely dry (drying time at least 6 weeks) and hardened.

The final decision on whether a cement floor is dry enough to install vinyl flooring on it lies with the installer. Although it is not susceptible to damage from moisture, moisture in the base floor can lead to the formation of mold, rot and mildew. It is advisable only to install the floor covering when the building is free from any risk of water damage (i.e. when the exterior walls, doors, windows and roofs have been installed), when the necessary measurements have been taken of the support layers and any additional work has been completed.

The warranty does not cover cases where damage and/or discoloring is caused by mold, flooding of the vinyl flooring, dripping taps or water that has leaked into unsealed areas.

Remove any existing floor covering; there should be no signs of mold or insect infestations; make sure that the subfloor is even. Apply a level floor or leveling compound on top to achieve a smooth, even and fully prepared floor.

Make sure that the subfloor is completely dry, smooth, stable, clean and free of grease and chemical stains. All touch-up work on the subfloor should be performed using a mixture of non-shrink and waterproof cement. Work in accordance with UNE-CEN/TS 14472.

You must take into account the building's joints; a transition profile can be used to place a joint in the flooring.

If installing on existing flooring, these must be smooth or they can be smoothed. If removing the existing floor covering is not an option, it should be leveled with a cementitious overlay. Do not install on carpets, other vinyl flooring or substrates that are not uniform; remove any porous floor covering (carpets, felt, etc.).

Vinyl boards should not be installed on wooden base floors that lay directly on cement or beam constructions. All wooden or wood composite panels are suitable as base floors for vinyl boards, provided that they are smooth, flat, structurally sound and free of buckling. Plywood panels, particle boards and oriented strand boards (OSB) are suitable. However, generally, bear in mind that if the subfloor upon which the vinyl is being installed is hygroscopic, as is the case of wood or wood-based material, the way that vinyl flooring behaves will depend on the stability of the subfloor, which may be affected by changes in moisture and temperature. These changes may lead to swelling, shrinking, lifting, cracks, etc. and they may result in changes to the subfloor that have a negative impact on the vinyl flooring. Fiberboards such as MDF or HDF have a very high water absorption capacity and their use is not recommended in commercial areas. Make sure that the subfloor upon which the vinyl flooring is placed remains in a stable condition.

#### 2.4 Flatness

Make sure that the subfloor is completely even. You must correct any unevenness exceeding 2 mm that is greater than 1 m long, and any unevenness exceeding 3 mm that is greater than 2 m long. Vertical surface unevenness exceeding 1.2 mm is not permitted.

Any unevenness exceeding these parameters may cause problems in the flooring, e.g. breakages, the loosening of joints, buckling, warping, noise when walking on them, etc. which cannot be covered by the product's warranty.

Use a suitable leveling compound and check if a sealer or primer is required. It is essential to correct any imperfections and cracks on the surface.

#### 2.5 Screed moisture (mortar or anhydrite)

Before starting to install the LINKFLOOR, measure the moisture content of the screed. We recommend taking at least one measurement every 100 m<sup>2</sup>. In buildings with several floors, we recommend taking these measurements on different floors and in the most unfavorable directions (generally to the north) or in the most poorly ventilated areas (corridors). Do this at a depth that is approximately half the thickness of the screed and always at a minimum depth of 2 cm.

The moisture content can be calculated using capacitive, microwave or carbide electronic hygrometers. You must follow the manufacturer's instructions for the equipment you are using in each case.

The measurements taken with carbide hygrometers are the most accurate and should be used for reference and comparison for all other methods. Regardless of the measurement or calculation method used, always bear in mind that the sample must be representative of the thickness of the floor slabs.

A written record should be made of the measurements

taken. This record should be jointly signed by the person taking the measurements and the representative of the Site Management/Client (for example, a clear photograph of the measurement can be considered a suitable record).

We recommend that the moisture content of the floor is below 2.5%. If it is going to be installed on a floor with a water underfloor heating system, the moisture should be below 2%.

#### 2.6 Installation on floors with water underfloor heating

Vinyl flooring can be installed on floors with water underfloor heating, provided that the temperature of the floor never exceeds 27°C, as damage may appear on the vinyl flooring. It is important for the floor under which the underfloor heating is installed to be dry before the heating is turned on and before installing the vinyl floor covering. The concrete must be left to cure for at least 21 days and, in the case of anhydrite, at least 7 days. The heating is maintained at 25°C for 3 days, gradually being increased until the maximum design temperature is reached, which is maintained for 4 days. Examine the surface and repair any cracks. Heating is then resumed for 14 days and then turned off at least 2 days before the leveling compounds and floor covering are installed; it is only turned back on 2 days after installation is complete.

#### 3. INSTALLATION:

This material can only be installed as a floating floor.

Check all of the panels before and during installation in optimal lighting conditions.

#### 3.1 Recommended tools:

You must have the following tools to ensure a proper installation: Knife and circular saw with cutting disc for wood, chisel or pull bar, spacers, tape measure, pencil, white rubber mallet or hammer, spirit level, block of nylon, ruling pen and, if necessary, tools for preparing the base floor.

#### 3.2 Orientation:

It is important to carefully plan the layout and installation of the vinyl floor, as this is the only way of ensuring that the boards at wall junctions and end boards are not too narrow or short.

It is advisable to install the boards in the direction of the room's main source of light. It is only advisable to install them lengthwise in long and narrow rooms.

#### 3.3 Planning the installation:

**3.3.1** Combining pieces from at least 3 different boxes during installation will help to ensure an even distribution of any minor variations in color or slight variations in texture and brightness levels.

**3.3.2** Plan the installation by measuring the dimensions of the rooms, so that you know whether the boards in the first row need to be trimmed. Ensure a minimum width of 5 cm and a minimum length of 30 cm. (The boards should be trimmed with a circular saw, to ensure a clean cut). **(See drawing A).**

**3.3.3** Place the first piece on the floor, using 10 mm spacers to leave the expansion joint between the board and the wall. Leave the edges of the female side (the edge with the largest machined profile) free to proceed with the following steps. Trim the tongues on the male side (the edge with the smallest machined profile) between the spacers and the wall, to make that edge smooth. **(See drawing B).**

**3.3.4** At an angle, insert the following board's male tongue into the short female side on the first piece and press it down. **(See drawing C).**

**3.3.5** Align the first two pieces being installed. You can use a block of nylon, tapping them gently; ensure that you tap the decorative part of the long side and avoid breaking the machined profile. **(See drawing E).** Follow the procedure in points 3.3.4 and 3.3.5 to install the entire first row. **(See drawing D).**

**3.3.6** When installing the final board in the first row, measure and trim it while maintaining a 10 mm expansion joint between the flooring and the wall. **(See drawing F).**

**3.3.7** Start installing the second row in the same direction as the first row.

At an angle, place the male tongue on the long side of the new piece onto the female side of the already-installed piece in the first row, pressing down on the long sides to lay the piece on the floor. Use the block if necessary **(See drawing E) (See drawing G).**

**3.3.8** Following the same procedure as in point 3.3.7, install the second piece, bringing both ends of the short side to within 3 mm and gently tapping the short side of the female profile until both sides fit firmly together. **(See drawing H).**

**3.3.9** When installing the final board on the second row, mark and cut the piece to size, leaving space for the 10 mm expansion gap between the piece and the wall. Use a chisel or hammer to properly install the short sides of both pieces. **(See drawing I).**

**3.3.10** You should continue laying the boards as detailed in points 3.3.7, 3.3.8 and 3.3.9 to ensure a proper installation. Make sure that all of the boards are securely joined.

**3.3.11** The flexibility of the pieces and the small angle required for their installation will make it easier to place them below door frames and in difficult-to-reach areas, e.g. below door frames, etc. If necessary, use the chisel to install them, after cutting the frame to the appropriate height so that it is not resting on the flooring. **(See drawing J).**

**3.3.12** They can simply be trimmed with a sharpened knife around obstacles and in areas with sharp angles, and then installed, with a 10 mm clearance always being left around the edge of heavy furniture, piping and vertical elements. It is often extremely helpful to make a cardboard template to trim the piece accurately. **(See drawing K).**

#### a. Installation of accessories:

##### a.1 Baseboards:

When installing the baseboards that are used to cover the expansion joint around the edge, follow the basic rule of never joining them to the flooring. Baseboards should only be fixed to the wall and never fixed to the flooring with silicone sealant or lost head nails.

##### a.2 Profiles:

In areas with doors, passageways and areas greater than 225 m<sup>2</sup> and also in areas longer than 15 meters and/or wider than 15 meters, it will be necessary to create expansion joints. The vinyl flooring should not be screwed in or fixed to the floor in any way.

With regard to the expansion joints, we recommend installing transition profiles to hide these joints. Ensure that these profiles do not fix the flooring to the floor; no adhesive or mechanical force that hinders the free movement of the installation should be used to join them together.

Protect the finished installation from exposure to direct sunlight and possible combing and deformities of the boards.

Do not place kitchen or bathroom furniture or any other overly heavy items on the flooring. If necessary, place an expansion joint around the furniture; a profile can be used to improve its appearance. Make sure that no boards have been fixed to the floor in any way.

The vinyl flooring should not be screwed in or fixed to the floor in any way. Avoid placing heavy furniture on the flooring that would impede the normal movement of the floating floor.

Some types of nails, such as normal steel nails, can change the color of the vinyl flooring. It is not advisable to screw in or glue the base panels! Solvent-based adhesives may also discolor vinyl flooring. Any discoloration of the vinyl floor caused by improper handling or by using the aforementioned substances is not the responsibility of the manufacturer; it is the responsibility of the installer.

#### b. Installation in kitchens and bathrooms:

In areas such as kitchens and bathrooms, install them in the same way as above while bearing in mind that:

- Installation is only recommended in bathrooms and kitchens for residential use.
- Do not install it in saunas, commercial laundromats or areas in which the floor is usually very wet or exposed to extreme temperatures.
- To prevent the water from seeping through the floor in wet areas, the whole 10 mm perimeter joint must be sealed with flexible silicone sealant.
- We recommend installing an expansion joint on bathroom and kitchen doors.
- Do not install kitchen units on LINKFLOOR flooring. Also, fill the expansion joints of stationary objects such as kitchen units, door frames, sinks and toilets with silicone sealant.
- Do not install LINKFLOOR flooring in rooms with water drains in the subfloor.

#### 4. INSPECTING THE INSTALLATION

##### 4.1 Temporary protection of the flooring:

The installation should be planned to coincide with the final finishing phases and, whenever possible, after painting work is completed. During finishing work, the moisture and temperature conditions established for the rooms in the above sections of this manual must be maintained. For flooring used in the finishes of large projects, a number of weeks (or even months) may pass between installation (whatever the system) and the start of the finishing work. In such an event, the LINKFLOOR should be protected with suitable material by the owner of the site, in each subsequent phase of the construction works. We recommend using a breathable material for that purpose.

##### 4.2 Acceptance inspection:

When the installation work is completed, the installed flooring must be inspected, observed in a standing position, with natural light behind the observer. No angled light sources should be used and there should be no backlit inspection of the floor to locate any unevenness on its surface. The final inspection of the installed flooring will be performed within seven days, with the supplying company being informed of any observations that are deemed appropriate.

When the installation and verification work has been completed, whoever is in possession of the installation at any given time is responsible for maintaining these conditions.

#### 5. REPAIRS

Vinyl floors are strong and durable. If one or more boards are damaged, they can be replaced. If the damaged board is in the middle of the room, the simplest thing is to take up all of the boards until you reach the damaged one. Remove and replace it and reinstall the other boards according to the installation instructions.

#### 6. CARE AND CLEANING

Place a doormat in front of each entrance from outside, to prevent any dirt, sand, gravel and other substances from dirtying the floor and possibly damaging it.

Only use colorfast carpets on your floor. Do not place rubber-backed or latex-based carpets or coconut fiber mats on the vinyl flooring as they may stain the flooring or damage the surface. They may also cause a magnifying effect, affecting the dimensional stability of the pieces, resulting in deformation and buckling. Put up curtains or blinds to prevent the floor from being directly exposed to sunlight; a combination of heat and direct sunlight can discolor and/or deform the pieces.

When the sunlight is strong, close the curtains or blinds, especially when the sun is shining on the floor. A combination of heat and sunlight can cause discoloring and fading on a lot of furniture and flooring.

Protect furniture and chair legs. Do not drag heavy furniture across the floor. We recommend having wide chair and furniture legs (at least 2.5 cm per inch in diameter), made of unpigmented hard plastic, which rest flat on the floor. Place non-staining felt pads on them. Do not use soft rubber to avoid any build-up of dirt; continuous contact with rubber can cause permanent stains. Use unpigmented type W castors, which are suitable for vinyl floors. Place protective mats below chairs with wheels, to prevent the vinyl flooring from being damaged very quickly.

If you have to slide heavy furniture or appliances over the vinyl floor, do not drag heavy furniture directly over the flooring. Always use a support base such as a mat, even when using a trolley with castors or when the heavy objects have castors. Clean your floor at least once a week using clear water. L'Antic Colonial recommends using Clean and Green Active for the most intensive cleaning of vinyl flooring. Follow the instructions of the manufacturer of the cleaning product, as if you use too much it may leave a film on the floor.

##### 6.1 Tips for removing stains:

It is highly stain-resistant and most liquids can be easily and quickly removed with a clean, white cloth. However, some liquids are more difficult to remove. The way to remove them is described below. Carefully follow the tips that we provide to remove stains etc. Always work with a clean white cloth. Avoid spreading the stain. Wash the treated area in different stages if necessary and allow the floor to dry properly. Do not use wax or polishing machines. Also avoid using abrasive detergents, which may affect the brightness of the pieces.

L'Antic Colonial recommends using Clean and Green Active to clean vinyl flooring.

STAIN/PROBLEM	REMOVE
Food, Beverages	If the substance is gummy, scrape it off with an unsharpened utensil. If you are unable to completely remove the substance, use the intensive cleaning product Clean & Green Active, a remover with a soft nylon pad or a very soft brush. Soak a white cloth in the intensive cleaning product, place it on the stain and leave it to act for no more than one hour. It should then be possible to remove the stain.
Rust	Clean the affected area and use an intensive cleaning product, a soft nylon pad or a very soft brush. Soak a white cloth in the intensive cleaning product, place it on the stain and leave it to act for no more than one hour. It should then be possible to remove the rust.
chalk, ink, hair dye, permanent marker	Clean the affected area and use an intensive cleaning product such as Clean and Green Active, a soft nylon pad or a very soft brush.

#### 7. WARRANTY

This warranty covers all manufacturing defects, under normal conditions of use and with correct assembly and installation in accordance with the recommendations of L'ANTIC COLONIAL S.A.U, for a period of two years from the date of purchase by the first user.

L'ANTIC COLONIAL S.A.U, hereby guarantees that our products covered by this warranty are of first quality and have the warranty granted by ISO 9001 certification and the Declaration of Conformity related to CE Marking.

We recommend a careful check of the condition of the goods at the time of delivery. Any anomaly, damage or breakage detected during transport must be noted on the delivery note of the transport agency.

##### COVERAGE

This warranty covers the following Linkfloor collections referred to in these instructions:

In the event that damage or defects are reported in any of the products covered by this warranty, L'ANTIC COLONIAL S.A.U, will carry out the relevant tests in order to establish the suitability and quality of the product. Should it be established that the reference in question does not comply with the parameters established in international standards, L'ANTIC COLONIAL S.A.U, will repair or replace the product(s) in question with the same product(s), reserving the right, at the sole discretion of L'ANTIC COLONIAL S.A.U, to make cash returns, which will correspond only to the net value of the product at the date of purchase.

##### WARRANTY COVERAGE PERIOD

This warranty certificate will be valid for the term specified on the table below, starting from the date on which the product was purchased, i.e. the trade date recorded on the invoice issued to the initial user, for floors that have been installed in rooms that are exposed to normal wear and tear for their recommended End Use Category, in accordance with standard EN 10582.

Any product replacement or cash refund in the event of a claim will not alter or extend the original terms established in this certificate, which is issued solely and exclusively for the individual or legal entity recorded on the invoice. This warranty is non-transferable.

##### WARRANTY CONDITIONS:

L'ANTIC COLONIAL S.A.U, shall be obliged to repair or replace products covered by this warranty provided they meet the following conditions:

- The product must have been purchased in an Official Dealer.
- The product must not have been altered or modified since its shipping from factory.
- All recommendations for installation, use and maintenance from L'ANTIC COLONIAL S.A.U, must have been respected.
- The products must not have been used, or have been exposed indefinitely in any showroom, the warranty period for these items being of 30 days.
- The products must be accompanied by valid proof of purchase.
- The product's purchase price has been completely satisfied.

NOTE: The warranty document shall be applicable, subject

to consumer rights established by the law in force in each country as well as the provisions of European Community legislation.

#### EXEMPTIONS

This warranty covers defects relating to the intrinsic quality of the product arising from manufacturing defects and therefore does not cover the following situations:

##### a) Improper maintenance:

- Derived from the use of products not recommended by L'ANTIC COLONIAL S.A.U., for initial and periodic cleaning.
- Derived from subjecting products to substances that may cause a chemical attack, as well as from subjecting the product to abnormal conditions (this includes, but is not limited to, damage from misuse or transportation, damage from excessive heat, exposure to adverse weather conditions, damage from improper care and maintenance causing chipping or breaking).

-Derived from the extended contact of products with agents that can stain or erode the surface in any way.

-Derived from disregarding the maintenance and cleaning recommendations established in the manuals and guides of L'ANTIC COLONIAL S.A.U,

-Derived from the inadequate transport and/or storage of the product since its departure from our establishment.

##### b) Installation faults or defects:

-Derived from the omission of the recommendations established in the installation, laying and use manuals of L'Antic Colonial.

-Derived from inadequacies in the leveling, tuning, drying and/or curing of the support surface.

-Derived from structural deficiencies, as well as incorrect location, laying and/or treatment of expansion, perimeter and structural joints in the installed area.

-Derived from the use of products not recommended by L'ANTIC COLONIAL S.A.U, for installation and/or maintenance.

##### c) Abnormal use of the products:

-Derived from the use of the product in contexts other than those specified by L'ANTIC COLONIAL S.A.U,

-Derived from the installation of the product in environments that exceed the traffic and working conditions determined by L'ANTIC COLONIAL S.A.U,

-Derived from the application of additives and surface elements not recommended by L'ANTIC COLONIAL S.A.U,

##### d) Facts not attributable to L'ANTIC COLONIAL S.A.U.:

-Actions or omissions that may affect the product, regardless of whether these are carried out by the buyer or by third parties. This includes, but is not limited to: damage or injury caused by unintentional acts, working conditions, architectural or engineering design, structural movements, acts of vandalism or accidents.

-The normal features and evolutions of the natural product. There may be slight differences in shade between the different elements that compose it and differences in hue or grain. In addition, if the products are compared at different times, time and weather conditions may cause variations in color and/or hue.

-The customer's personal preferences such as color, workmanship, etc. The choice of color and finish must be definitive before closing the purchase, as subsequent changes of decision will not be covered by this warranty.

-Installed parts with obvious visual defects, including labor costs for disassembly and assembly of products with visible defects. We recommend that the material be checked for defects prior to installation.

-Natural and public situations not related to the product such as earthquakes, landslides, floods, fire, vandalism.

-Normal wear and tear.

-Damage caused by moisture, wear due to use, wear caused by stones, sand or other abrasives.

#### EXCLUSIONS

Being related to the intrinsic quality of the products, the warranty of L'ANTIC COLONIAL S.A.U., does not cover:

- the value of installation and reinstallation materials;
- any legal interest on the value paid for the products;
- The value of the damages, whether direct or indirect, that may be generated before and/or during the claim or repair process to the commercial, industrial, professional or residential activities of the buyer, the user of the product or a third party.
- the costs of materials or labor associated with the reinstallation of the product covered by the warranty after

replacement by L'ANTIC COLONIAL S.A.U., nor any additional repairs or modifications such as plumbing, electricity, coatings, veneers and modifications that may be necessary for the replacement of the product covered by this warranty (such repairs and modifications shall be the responsibility of the end consumer);

-No other value not described in this certificate.

During the term of this guarantee, L'Antic Colonial reserves, without prior notice, the possibility of modifying the technical specifications and design of their products which should not be considered as manufacturing defect.

The company L'ANTIC COLONIAL S.A.U. also reserves the right to visit the site, according to a previously agreed date, in order to examine the product and check the warranty conditions.

L'ANTIC COLONIAL S.A.U., WILL NOT BE HELD RESPONSIBLE FOR ANY SPECIAL, INCIDENTAL, INDIRECT OR CONSEQUENTIAL DAMAGES, AMONG OTHERS: LOSS OF PROFIT, REVENUE OR INFORMATION (WHETHER DIRECT OR INDIRECT) OR LOSS OF BUSINESS FOR BREACH OF ANY EXPRESS OR IMPLIED WARRANTY OF ITS PRODUCT, EVEN IF L'ANTIC COLONIAL S.A.U., HAS BEEN PREVIOUSLY ADVISED OF THE POSSIBILITY OF SUCH DAMAGES. Some local jurisdictions do not allow the exclusion or limitation of special, indirect, incidental, or consequential damages, so this limitation or exclusion may not apply to you.

EXCEPT WHERE PROHIBITED BY APPLICABLE LAW, ANY IMPLIED WARRANTY OR CONDITION OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE WITH RESPECT TO THIS PRODUCT IS EXPRESSLY EXCLUDED. Some local laws do not allow limitations on how long an implied warranty lasts, so this limitation may not apply to your jurisdiction.

**PROCESSING OF A WARRANTY CASE:**

If you wish to validate this warranty, be sure to follow the steps below:

-Verify that you have complied with all the steps and requirements established in the installation, use and maintenance manuals of L'ANTIC COLONIAL S.A.U.

-Report in writing to the authorized dealer/seller or directly to the company L'Antic Colonial S.A.U, Crta. Nacional 340, km 54, 12540 Villarreal, Castellón, Spain within 30 days of the occurrence of the damage or defects.

The warranty does not affect the legal rights of the consumer and user in the event of non-conformity of the products with the contract. The action to claim compliance with the provisions of the additional commercial warranty shall lapse six months after the end of the warranty period.