


Model: TREVILLE 1L CHOCOLATE

Codes: 100314677

Group: G-238

Format: 13X109,2X1,4CM

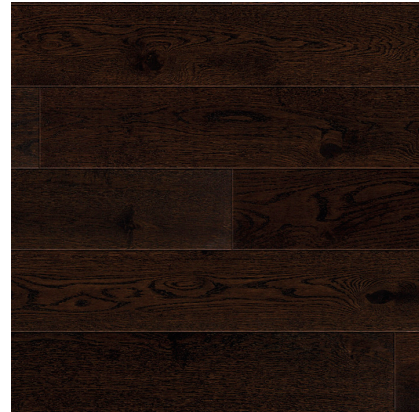

COMPOSITION

	Size	Material	Type of material
Layer 1	0.060-0.070	Varnish	APRESTO MATTE
Layer 2	2.5	Hardwood Layer	Oak wood
Layer 3	9	Intermediate Layer	PINE
Layer 4	2.5	Backside	PINE



TOLERANCES

Squareness of the item	0.2% of width.
Curvature	0.1% of length.

LABORATORY TESTS

Thermal conductivity	0.14 W/M*K	UNE-EN 12667:2002*
Heat resistance	0.103 M2*K/W	UNE-EN 12667:2002*
Formaldehyde emissions	0.011 +/-0.001 mg/m3	EN - 717/1:2006*
Moisture content	7% +/-2%	UNE-EN 13183-1 / AC:2004*
Flammability	Dfl-S1	UNE EN 13501-1:2007*
Bulk density	min 500kg/m3	UNE-EN 323:1994*
Biological durability	NPD	UNE-EN 335-1,-2*
Slip resistance (pendulum-wet)	CL 1 (36)	UNE 41901*
Slip resistance (pendulum-dry)	CL 3 (55)	UNE 41902*
Slip resistance (dcof)	0.57	ANSI A137.1*



FEATURES

- It is one of the easiest to install and safest systems in the market. We just need to adjust the board to be installed longitudinally to the one already placed, by applying a soft pressure without the need for any type of tool. Both pieces will fit and will be secured thanks to the safety tab. It is just as simple to take apart, which makes for a quick disassembly
- Applying a color oil or varnish on the wood surface in order to get different color ranges.
- L'ANTIC COLONIAL's varnishing, in two finishes, APRESTO (gloss) and APRESTO MATE (matte), provides a unique surface quality that satisfies the most demanding requirements. Advantages: It achieves the highest cleanliness because, since the pores are sealed, dirt and dust remain on the surface and can be easily cleaned.
- Is suitable for installing on water radiant heating
- Material with some knots on its surface that can have different sizes depending on the type of wood. These, along with any cracks that may appear, are covered with putty.
- Installation system where gluing the boards to the floor is not necessary. They are placed on a foam, joined together, as long as the product does not already have a foil on the back of the piece.
- There are consistent color changes between pieces.
- Independent (non-governmental) certificate that guarantees consumers that forest products come from rationally exploited forests
- 2.5 mm
- Installation system where gluing the boards to the floor is not necessary. They are placed on a foam, joined together, as long as the product does not already have a foil on the back of the piece.
- Slight smoothing of the wood using a brush to achieve a surface with a slight relief.
- Beveled cut on all 4 edges of the board for emphasizing size
- Quality product made with selected raw materials, guaranteeing its full residential use for 30 years as provided by L' Antic Colonial.
- Format where only one board has been used to finish the entire base surface
- It is necessary to apply adhesive for installing it.
- Made with oak wood.
- Material from a European country.
- Structure formed by an upper layer that shows the noble aspect of the material, an intermediate layer of wood of different typology, depending on the collection, or HDF board that compensates the tensions between the different parts and a lower plywood that provides dimensional stability.
- It is necessary to apply adhesive for installing it.

PACKING

Sales units per box	0.99372 M2/BOX
Sales units per pallet	39.748798 M2/PAL
Sales units per square meter	1 M2
Sale unit	M2
Base unit	ST
Net weight	8.382643 KG/M2
Gross weight	8.678501 KG/M2

SPECIAL PIECES

SAP	Description	Group	Boxes	Pallet	Units	SKU	Basic Unit	Net Weight	Gross weight
100214349	IGUALACION TREVILLE CHOCOLATE4,5X270X1,3	G-161	10 PIECES/BOX	1000 PIECES/PAL	8.23 PIECES/M2	-	-	1 KG/PIECES	1.02 KG/PIECES
100214397	MAMPERLAN TREVILLE 1L CHOCOLATE 7X107X3	G-163	2 PIECES/BOX	200 PIECES/PAL	13.35 PIECES/M2	-	-	1.58 KG/PIECES	1.64 KG/PIECES
100214430	TRANSICION TREVILLE CHOCOLATE 4X270X1,3	G-161	10 PIECES/BOX	1000 PIECES/PAL	9.26 PIECES/M2	-	-	1 KG/PIECES	1.02 KG/PIECES
100214440	ZOCALO TREVILLE CHOCOLATE 8X220X1,4	G-128	12 PIECES/BOX	600 PIECES/PAL	5.68 PIECES/M2	-	-	1.33 KG/PIECES	1.38 KG/PIECES

